

0667

Recessed ceiling luminaire



This ceiling luminaire with its smooth and flat design are applicable for accommodation and public areas. They are designed according to rules of maritime classification societies, additional VDE and IEC/EN.

The Lighting fixtures with their high quality light distribution are easy to install and maintain. Zinc coated steel sheet. Powder coated white RAL 9016 and enamelled up to 70 - 80 µm thickness.

0667



0667 recessed luminaire - quadratic

0667 recessed luminaire

TECHNICAL DESCRIPTION

LIGHT SOURCE

Designed for T26 fluorescent lamp 18W, 36W (not included).
Lamp base G13.

OPTIC

Opal polycarbonate

ELECTRIC

With magnetic ballast, low or high power factor, as standard;
electronic ballast available. Flexible wiring heat resistant up to
105°C

APPLICATION

For accommodation and public areas etc

DESIGN

According to rules of maritime classification societies, additional
VDE and IEC/EN

HOUSING / FINISH

Zinc coated steel sheet. Powder coated white RAL9016 and
enamelled up to 70 - 80 µm thickness

MOUNTING


To be mounted with 8/12 holes, Ø 4,5 mm

CONNECTION


4 grommets for max. cable Ø 12,7 mm. Terminal 3-pole/6 mm².

0667

MEASUREMENT DRAWINGS


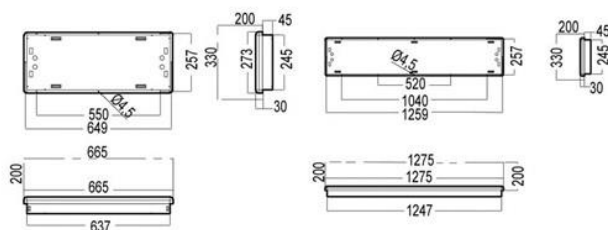


06667 recessed luminaire - measures see item level

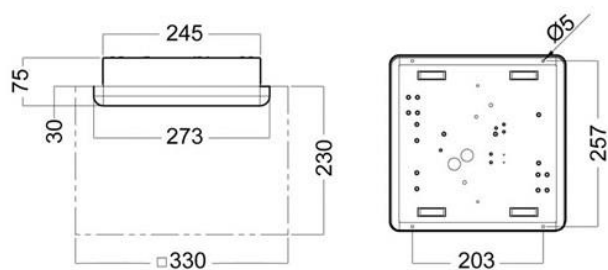

06667 recessed luminaire quadratic - measures see item level

LIGHT MEASUREMENT DRAWINGS

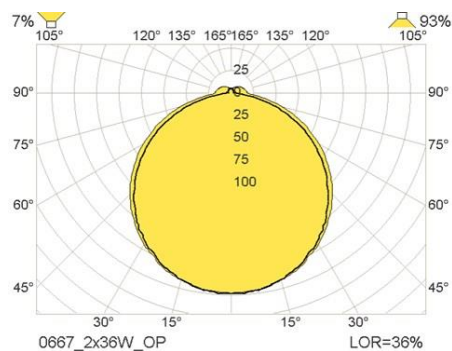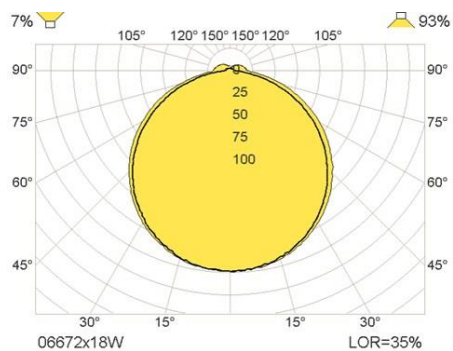

0667

EXPLOSION DRAWINGS

