

E80-S

EXIT sign surface



EXIT signs are applicable for escape routes and directory signage. They are designed according to rules of maritime classification societies and go along with ISO 7010.

Emergency sign for recessed or surface mounting based on LED. Housing in aluminium and zinc coated steel sheet with sign in polycarbonate. Available in White. Other colours on request.


E80-S

TECHNICAL DESCRIPTION

LIGHT SOURCE
LED
CONNECTION
2 holes on top for max. cable Ø15 mm. At sides two knockouts, one each side for max. cable Ø13 mm. 5x2x2.5 mm² push in terminal.
OPTIC
Polycarbonate with symbol inside visible from both sides. Signs for 20 metres reading distance 10x26. Option for 30 metres reading distance 15x26. Signs delivered with luminaire.
ELECTRIC
Electronic ballast 220-240V, 50-60Hz. Delivered with 1 hour (E1) or 3 hour (E3) with integrated battery. Option for centralized battery 230V (Z) S = Standard ST = Selftest DALI = addressable system Z = 230V central battery system
HOUSING
Die casted aluminium surface mounted, component plate in polycarbonate

APPLICATION
For escape routes and directory signage
DESIGN
DNV approved design according to maritime classification societies, additional IEC/ISO.
FINISH
Housing white powder coated RAL9016
MOUNTING
To be fixed with two screws

MEASUREMENT DRAWINGS

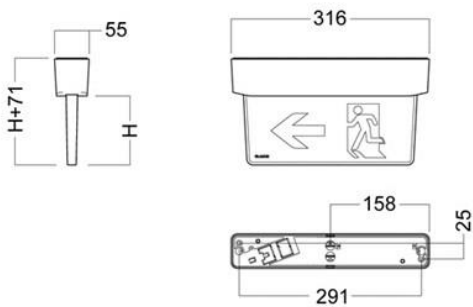

Type	H mm
10x26	105 mm
15x26	155 mm

E80-S

GALLERY



E80-S