

- Low recessed downlight
- Easy installation and change of light source
- Comprehensive trim choice, including IP45
- Easy mounting of décor with bayonet connection
- Choice of connector system
- Approved for use in B0/B15 ceilings

Specifications

Recessed downlight approved for use in B0/B15 ceiling. (For B15 additional insulation is required) Luminaire body of galvanized white painted steel with aluminium reflector.

Décor elements of painted, chromed or brushed steel, brass, aluminium, glass and acrylic. Trim of painted, chromed, brushed steel, brass or aluminium.

Trim ring, décor elements and light control components to be ordered separately.

IP45 underside ceiling with IP45 diffuser that has to be ordered separately.

Can be supplied with 3 hour battery back up. All internal wirings double insulated and halogen free type.

Light source

10/13 and 18W TC-D/TC-DEL.

Light source not included.

Ballast

Casa (M) is supplied with compensated conventional ballast (F), uncompensated conventional ballast (L) or electronic ballast (HF). Casa (M) is also available with dimmable ballast, digital (HFDd), analogue (HFDa).

Mounting

Mounted by screws.

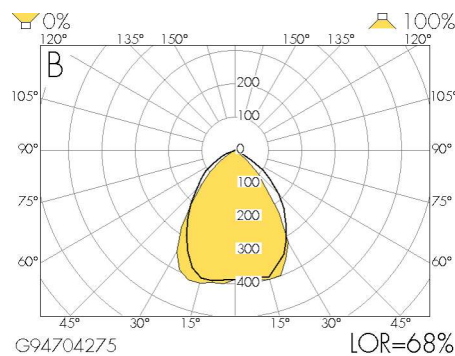
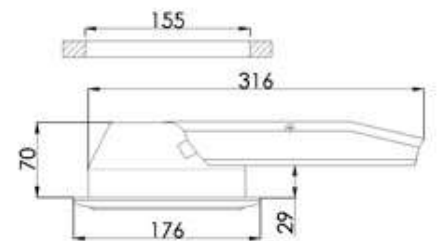
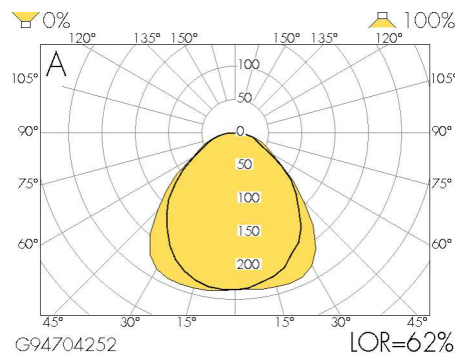
Max ceiling thickness 19mm. Plaster ring for mounting in plaster ceilings.



Connection

Ensto NAC 3-pole ready for through wiring.

Dimmable versions have 5-pole NCC connectors.

Other systems on request.



IP22/IP45, Ta=25°C, DNV/B0  

| Product name | F 230/50 | L 230/50 | HF | HFDd | HFDa | Weight kg | Lamp F Code | Lamp Code | Pol. Dia. |
|----------------------|----------|----------|--------|--------|----------|-----------|-------------|-----------|-----------|
| CASA(M) H70B0 113 AL | 104009 | 104009L | 100881 | 100885 | 1088502 | 1.2 | TC-D | TC-DEL | A |
| CASA(M) H70B0 118 AL | 104008 | 104008L | 104081 | 104085 | 10408502 | 1.2 | TC-D | TC-DEL | B |