

EYEBALL 100 MARINE

- Approved for marine use
- Recessed adjustable downlight
- Available in white, brass, chrome or brushed steel
- Easy installation and change of light source

Specifications

Recessed adjustable downlight with body of self-extinguishing polyester (stanyl).
Trim elements of painted/chromed/brushed steel or brass included.
All internal wiring is heat resistant.
Tilttable max 30°, rotates 90°.

Light source


QR-CBC lamp 20/35/50W (GU5.3 12V).
Halopar 16 lamp 35/50W (GZ/GU10 230V).
Light source not included.

Mounting

Mounting by use of adjustable brackets for max ceiling thickness of 25mm.
Over 25mm, to be fixed by using screws.
Weight distribution panel for T-profile ceiling available (load-bearing frame).


Connection

Ensto net 2-pole plug for 12V version.
Ensto net 3-pole plug for 230V version.
Other systems or terminal blocks on request.

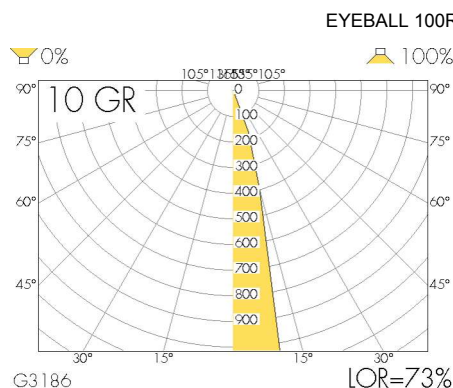

EYEBALL 100R (M)

EYEBALL 100R (M)



IP20/IP44, Ta=25°C



Product name	12V/IP20	230V/IP20	Weight kg	Lamp Code	Base
EYEBALL 100R 50W WHITE	10742521		0.5	QR-CBC	GU5.3
EYEBALL 100R 50W BRASS	10742621		0.5	QR-CBC	GU5.3
EYEBALL 100R 50W CHROME	10742721		0.5	QR-CBC	GU5.3
EYEBALL 100R 50W BR STEEL	10756021		0.5	QR-CBC	GU5.3
EYEBALL 100R 50W WHITE		10742021	0.5	QPAR-CB16	GZ10/GU10
EYEBALL 100R 50W BRASS		10742121	0.5	QPAR-CB16	GZ10/GU10
EYEBALL 100R 50W CHROME		10742221	0.5	QPAR-CB16	GZ10/GU10
EYEBALL 100R 50W BR STEEL		10755521	0.5	QPAR-CB16	GZ10/GU10

Accessories

LOAD-BEARING FRAME

Transformer has to be ordered separately.