

Accessories

Controllers AA150 • AA560
• AA320 • AA340 • AA710 • AA730

3 YEAR
Limited Warranty



MAXWELL AA710 WIRELESS, HAND HELD REMOTE WINDLASS CONTROLLER AND RODE COUNTER (P102981)

All the features of the AA560 plus options to control a bow thruster or deck lights and anchor wash.

- High level wireless transmission security - 2.4GHz ISM band.

- Hand held controller displays rode count plus signal strength and battery level.
- Console requires two AA batteries.
- Ergonomic shape with wrist strap connector.
- Water resistant to IP67.
- Rubber moulding for grip and non slip protection.
- Console holder and protective cover.
- Shockproof.
- IEEE 802.15.4 compliant.


Kit includes: 1 hand held remote control and 1 base station, 1 sensor and 1 magnet. Note: Two base stations can be operated by one remote to allow control of two windlasses. Plug and Play connectors, T-Connectors and Gender Adaptors are also available. Contact your Maxwell Dealer.

Electronic windlass control and rode monitoring

RCM2 and RCM4 Radio Remote Controls (P104816) (P104817)

These new, hand held wireless control units are ideal for remotely operating the up/down function of a single windlass (RCM2) or a dual windlass installation (RCM4). The RCM2 can also be used for control of a bow thruster, whereas the RCM4 can be used for controlling a windlass and a bow thruster or a bow and stern thruster simultaneously.

These units are also suitable for the operation of other on board, electrically driven equipment.

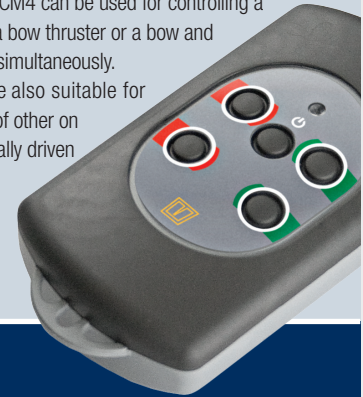

MAXWELL AUTOANCHOR WIRED ROVING REMOTE CONTROL UNITS

ANCHOR LAUNCHING OR RETRIEVAL FROM THE BOW WHEN VISION FROM THE HELM STATION IS OBSTRUCTED.

- Use for Windlasses, Davits, Thrusters and other Marine Equipment.
- Electrical protection against back-emf.
- Rubber over-moulding for shock protection and grip.
- Stowage cradle.
- Operate in parallel with all AutoAnchor™ products, toggle switches, foot switches or other control equipment.
- Connect to DC, AC and Hydraulic systems.
- Rugged 4m coiled cable and connectors.
- All products are rated to IP67 including cables, plugs and sockets.
- Deck socket with 2m flying lead reduces potential for corrosion.
- Other Maxwell AutoAnchor controllers are available, check with your local Maxwell distributor.



**AA730
With Rodecounter
(P102944)**



**AA342
Dual Windlass
Control
(P102996)**

**AA320
Windlass
Control
(P102992)**



4 m cable



Rated to IP67 the moulded deck socket has a 2 m flying lead for better connectivity



**Gender Adaptor
Cable Connector
(SP4192)**



**Dual Installation T
Connector
(SP4155)**

