

0666

Surfaced ceiling luminaire



Surfaced ceiling luminaires are applicable for a wide range of different areas, e.g. accommodation and public areas, wardrobes, workshops, engine rooms, stores, etc. They are designed according to rules of maritime classification societies, additional VDE and IEC/EN.

Ceiling luminaires with their smooth design are easy to install and maintain. Zinc coated steel sheet. Powder coated white RAL 9016 and enamelled up to 70 - 80 µm thickness.

Highlights:

- Smooth design
- Especially flat
- Easy to clean

0666

TECHNICAL DESCRIPTION

LIGHT SOURCE

Designed for 2 x T8, 18 or 36 W (not included).
Lamp base: G13

MOUNTING

To be mounted with 4/6 holes, Ø 5 mm.

ELECTRIC

Electronic ballast (HF). Variants with magnetic ballasts available on request. Flexible wiring heat resistance up to 105°C.

HOUSING

Powder coated white RAL90106 and enamelled up to 70-80 µm thickness.

APPLICATION

For accommodation and public areas etc.

DESIGN

According to rules of maritime classification societies, additional VDE and IEC/EN.

DIMENSION

W: 275 H:60 L:666

DIFFUSER

Opal polycarbonate


CABLE ENTRY

3 grommets for max. cable Ø 11 mm for 18 W; max. cable Ø 12,7 mm for 36 W.

TERMINATION

Terminal 3-pole/6 mm²

MEASUREMENT DRAWINGS

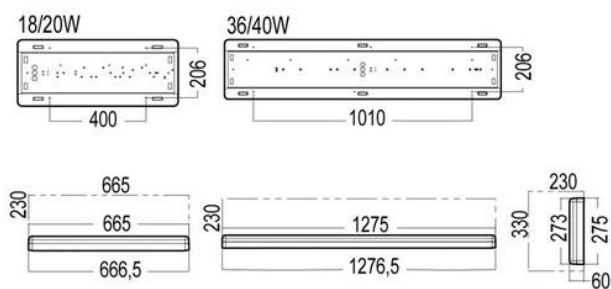

0666 surfaced luminaire

